

Electric Hydraulic Torque Wrench Pump

Aluminum frame for easy carrying and protecting the elements


Oil cooler permits 24 hours' uninterrupted running

External pressure adjustor
Built-in pressure relief valve


Aluminum tank for reduced weight and added portability

Long hose enables remote control

Oil level indicator

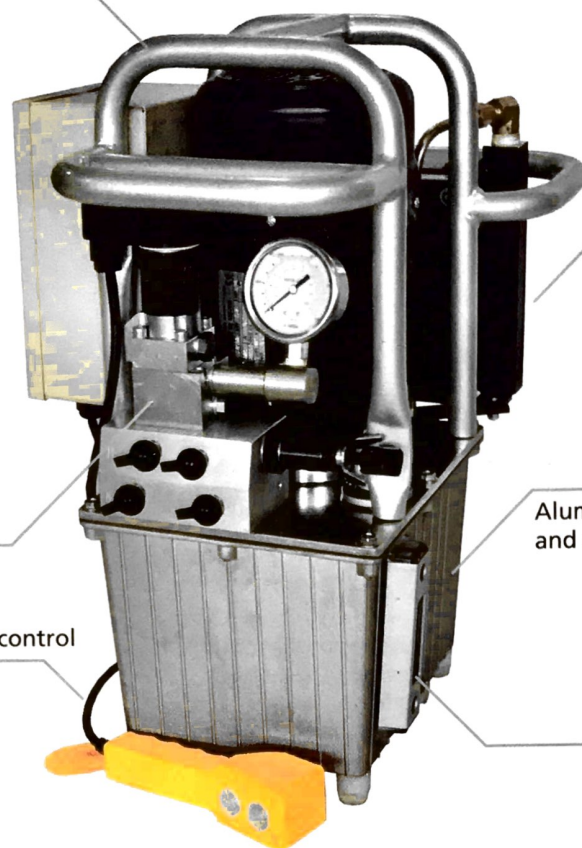

Pump and Torque Wrench setup

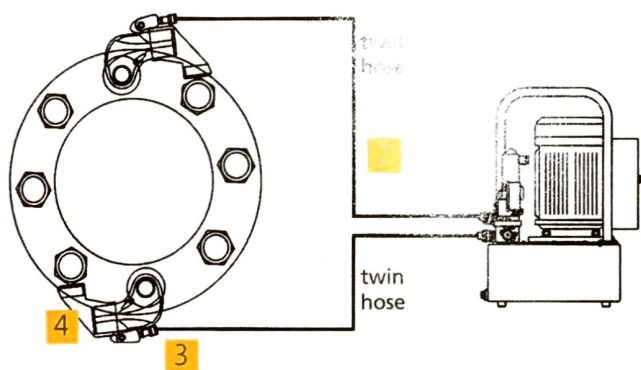

1. Compact 3-stage pump for operation with hydraulic wrenches
One pump drives two hydraulic wrenches(standard setup)
Aluminum tank and oil level indicator
Oil cooler for continous operation
Infinitely variable pressure adjustment between 40-800 bar

1. Hydraulic torque wrench pump 2. Hydraulic twin hose 3. Quick couplings(male + female) 4. Hydraulic wrench

Benefits Compact and lightweight design.
Convenient external pressure adjustor
Proven high quality solenoid valve and plunger piston

Model	Working pressure	Power rating	Flow at low pressure stage	Flow at high pressure stage	Voltage	Frequency	Oil Capacity	Packing size	G.W
HHB-6L	700 bar	1.3KW	8L/min	1.1 L/min	220 V	50 hz	6 Liters	400×550×500mm	30 kgs